

Rechargeable solar floor lamp

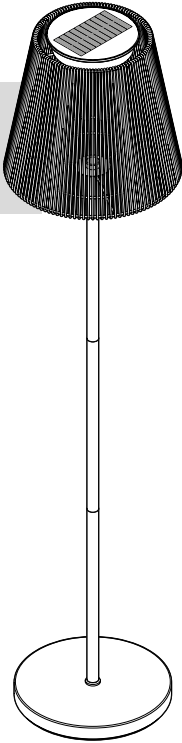
Instructions for use

Product number: 730 185



Safety warnings

- This product is equipped with safety features. Nevertheless, read the safety warnings carefully and only use the product as described in these instructions to avoid accidental injury or damage. Keep these instructions for future reference. If you give this product to another person, remember to also include these instructions. The product is only suitable for decoration in private homes and not for lighting whole rooms. The product has been designed for outdoor use. It is not suitable for commercial purposes.
- Keep the packaging materials out of the reach of children. They pose several risks, including the risk of suffocation!
 - Children are not aware of the risks involved in handling electrical appliances incorrectly. Therefore, never allow children to use electronic appliances unsupervised.
 - The product is suitable for outdoor use and, when the port is closed, conforms to protection type IP44. This means that it is protected against contact with tools, wires and foreign objects larger than 1 mm in diameter and splashes of water, such as rain. However, protect it from heavy rain and streams of water. Never use the product under water. This would immediately result in a short circuit.
 - Do not use the lamp or USB-C charging cable if they show any visible signs of damage, or if the lamp has fallen down.
 - A rechargeable lithium-ion battery is built into the light head. **Warning!** Lithium batteries can explode ...
 - ... if they are exposed to extreme heat, such as sunlight, fire, etc., or extremely low air pressure during use, storage or transport.
 - ... if they are taken apart, thrown into fire or short-circuited. Do not place any naked flames such as burning candles near the lamp. The lamp must be kept away from candles and other naked flames at all times to prevent the spread of fire.
 - Do not modify and/or deform/heat/dismantle rechargeable batteries. Do not immerse them in water either.
 - There is a risk of explosion if the battery is replaced incorrectly. The battery should be replaced only with an identical or equivalent type. If the rechargeable battery is defective, contact a specialist workshop or our customer care service.
 - When charging the lamp from the mains, note the following:
 - Only charge the lamp in dry indoor areas.
 - To charge the product, use only the supplied USB-C charging cable and suitable USB mains adapters (not included) that comply with the "Technical specifications".
 - Do not use a faulty USB mains adapter or attempt to repair such faulty USB mains adapter.
 - Do not cover the light head while it is charging.
 - Only connect the lamp to a properly installed power socket with a voltage that complies with the technical specifications of the mains adapter used. The power socket used must be easily accessible so that you can quickly unplug the mains adapter whenever necessary. Route the USB-C charging cable in such a way that it cannot be tripped over.
 - Unplug the mains adapter from the power socket if any malfunctions occur while charging, when the rechargeable battery is fully charged, during thunderstorms and before cleaning the lamp.
 - The LEDs permanently built into the light head cannot and must not be replaced.
 - Do not disassemble the light head beyond what is described in these instructions. Do not make any modifications to the product. Have repairs to the product carried out only by a specialist workshop or as arranged by our customer care service.
 - Do not switch on the lamp while it is still in the packaging.
 - Do not stick anything to, cover or paint the solar module.
 - Protect all parts of the product from impacts, falls, dust and extreme temperatures.
 - Do not position the product in hollows or depressions where puddles might form.
 - The product is suitable for outdoor use at temperatures from approx. -10 °C to +40 °C. In temperatures colder than this, keep the product indoors as it may otherwise become damaged.
 - The product is not designed to withstand strong winds, storms, etc.! Stow the product in a sheltered location if strong winds or storms are forecast.
 - Do not use any caustic, aggressive or abrasive products for cleaning.



Disposal

This product, its packaging and the built-in rechargeable battery have been manufactured from valuable materials that can be recycled. Recycling reduces the amount of refuse and preserves the environment.

Dispose of the **packaging** at a recycling point that sorts materials by type. Make use of the local facilities provided for collecting paper, cardboard and lightweight packaging.

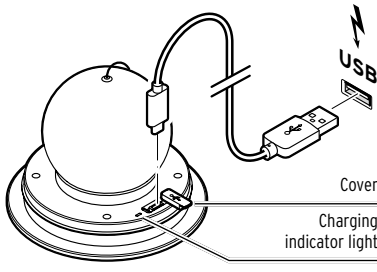
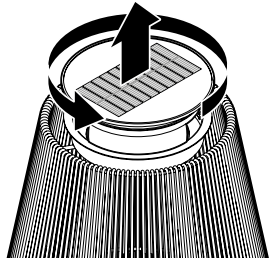
 **Appliances, single-use batteries and rechargeable batteries** marked with this symbol must not be disposed of along with household waste! You are legally obliged to dispose of old appliances separately from household waste. Electronic appliances contain hazardous substances and, if stored or disposed of improperly, may cause harm to health and the environment. Information about collection points where old appliances can be disposed of free of charge is available from your local authorities. Flat single-use and rechargeable batteries must be handed in at a local authority collection point or returned to a battery retailer.

For instructions on how to remove the rechargeable battery, see "Removing / replacing the rechargeable battery".

Charging the battery

The rechargeable battery comes in a half-charged state. This is to prevent it from becoming damaged. Fully charge the battery before first use, either via the USB connection to the mains (recommended) or via the solar module.

Charging via the USB connection to the mains

- 
- 
1. Hold the solar module by the top edge and twist it anti-clockwise to lift it out of the lamp shade.
 2. Open the cover and use the USB-C cable provided to connect the lamp to a mains adapter with a USB socket (not included).
 3. Insert the mains adapter into a power socket. During charging, the indicator light will light up red. The battery is fully charged when the indicator light lights up green. Charging time for a flat battery is approx. 4.5 hours.
 4. Then disconnect the lamp from the mains and replace the cover on the charging socket.
 5. Insert the solar module with the light head back into the lamp shade and turn it clockwise to secure it.

Information on rechargeable batteries

- To preserve the battery's full capacity, the battery should be recharged every three months even if the appliance is not being used.
- Charge the battery in an environment between +10 and +40 °C.
- The battery will hold its charge for the longest at room temperature. The lower the temperature, the shorter the battery life.


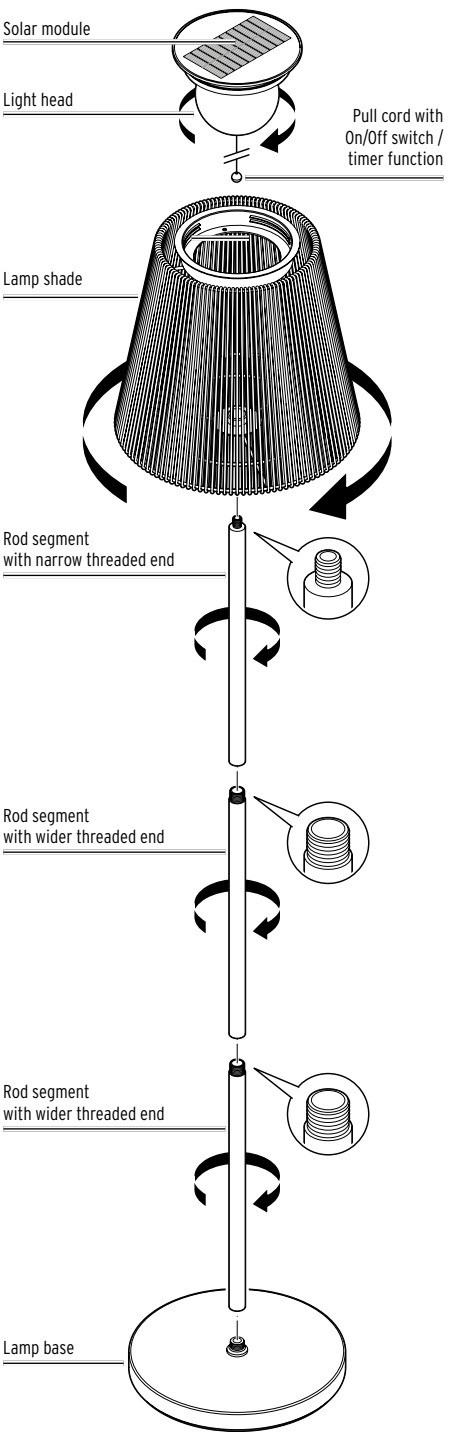
Charging via the solar module

Outdoors, the battery is automatically charged via the solar module in the light head. Consider and observe the following points:

- The solar module must be exposed to as much light as possible, so choose the location for the lamp with this in mind:
 - Place the lamp in a sunny location. Choose a site where the lamp will be exposed to direct sunlight for as long as possible during the day.
 - Avoid positioning the light in a fully, or mainly shady location (beneath trees, roof ridges, etc.). Do not place the lamp on the north side of a building where there is not sufficient sunlight during the day.

- The lamp should not be continuously exposed to other sources of light during the night, e.g. bright spotlights in a driveway or garage entrance, etc. Keep in mind that many light sources only switch on at night if activated by a time-switch or motion sensor.
- Depending on the weather and intensity of the sun, it can take a few hours for the solar module to fully charge the battery.
- During the winter or after a successive number of cloudy days, you may find that the battery is not sufficiently charged. Switch the lamp off for a few days - because even when switched off, the battery will still charge - or charge the battery from the mains via the USB socket.

Assembling the lamp

-  The solar module with the light head is already inserted into the lamp shade on delivery.
- 
- Solar module
- Light head
- Pull cord with On/Off switch / timer function
- Lamp shade
- Rod segment with narrow threaded end
- Rod segment with wider threaded end
- Lamp base

▶ Assemble the lamp as illustrated.

Activating/deactivating the lamp / timer function

- ▶ Pull the pull cord until you hear and feel it click ...
- ... **1x** to **activate** the lamp.
- Set to this standard setting, the lamp will switch on and off fully automatically:
- The lamp switches on at dusk.
 - The lamp switches off at dawn.
- ... **2x** to switch on the lamp with the **timer function**.
- The lamp flashes twice and then shines continuously for 4 hours at dusk. After that, the lamp goes out and only switches on again at the next dusk.
- ... **3x** to **deactivate** the lamp.
- The lamp is now switched off completely. The rechargeable batteries will continue charging once there is sufficient light.

Cleaning

NOTICE - material damage

- Do not use any caustic, aggressive or abrasive products for cleaning.

1. Remove dust from the woven lampshade using a duster.
2. Wipe all other surfaces with a soft, slightly damp cloth if necessary.
3. Then wipe all parts completely dry with a soft, dry cloth.

Problems / solutions

The light is not lighting up or is producing only a dim light.

- Are the surroundings too bright?
 - Check whether other sources of light (such as street lights or time or motion sensor-controlled outdoor lights) are shining onto the solar module.
 - If necessary, change the location of the lamp.
- Is the solar module provided with sufficient sunlight?
 - If necessary, change the location of the lamp.
- Is the rechargeable battery not fully charged?
 - Switch the lamp off for a few days so that the rechargeable battery can be fully recharged or connect it to the mains via the USB connection.

The LEDs are faulty.

- The LEDs are firmly built in and cannot be replaced.

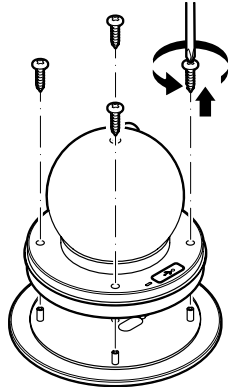
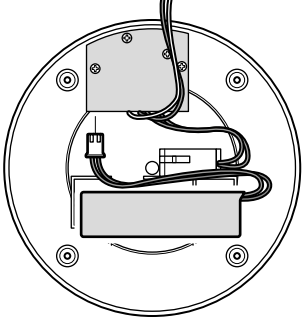
Performance varies depending on the season.

- It is quite normal for the light duration to change with the season. The battery charges itself using sunlight. On long, sunny summer days, it can store a lot of energy, allowing the light to shine all night long. In winter, the days are shorter and often cloudy, which means that the battery receives less charge and the light duration is correspondingly shorter. This is normal and not a fault.




Removing / replacing the rechargeable battery

The rechargeable battery is designed for long-term operation. However, after a long period of use it may need to be replaced. Rechargeable batteries are subject to standard wear and tear, and performance can diminish.

1. Switch off the lamp.
2. Turn the solar module with the light head anti-clockwise to remove it from the lamp shade.

- 
- 
3. Loosen the 4 screws on the light head with a Phillips screwdriver and carefully remove the light head. Be careful not to rip off any cables!
 4. Remove the plug of the interconnecting cable from the socket on the circuit board as illustrated and remove the rechargeable battery from its holder.
 5. Insert the plug of the new battery. You can order a new rechargeable battery by contacting our customer care service (see enclosed Warranty).
 6. Place the light head back onto the solar module and tighten the screws.
 7. Insert the solar module with the light head back into the lamp shade and turn it clockwise to secure it.

Technical specifications

Product number:	730 185
Power supply:	
Solar module:	5 V / 300 mA
Rechargeable battery:	1x lithium-ion battery, 3.7 V  2500 mAh (the  symbol indicates direct current)
	Watt-hour rating: 9.25 Wh
Input:	5 V DC / 2 A
Charging time (via USB connection):	approx. 4.5 hours
Light duration (with fully charged battery):	approx. 20 hours
Bulb:	LEDs (non-replaceable)
IP code:	IP44
Protection class:	III 
Ambient temperature:	-10 to +40 °C
Made exclusively for:	Tchibo GmbH, Überseering 18, 22297 Hamburg, Germany