


Ceiling and wall light

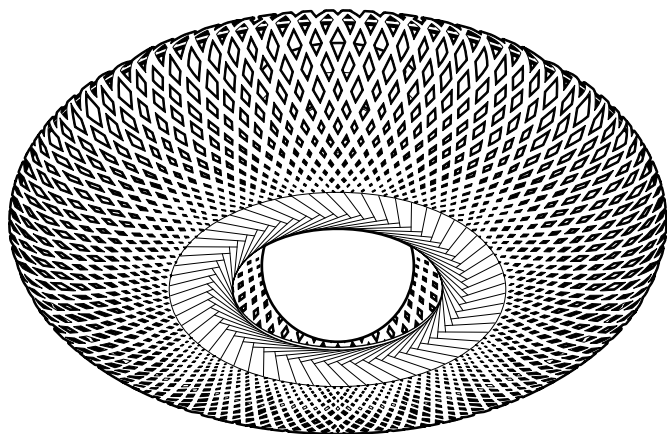

About these instructions

This product is equipped with safety features. Nevertheless, read the safety warnings carefully and only use the product as described in these instructions to avoid accidental injury or damage.

Keep these instructions for future reference. If you give this product to another person, remember to also include these instructions.

Symbols used in these instructions:



This symbol warns you about the risk of injury.



This symbol warns you about the risk of injury caused by electricity.

Signal words used in these instructions:

DANGER warns about the imminent risk of serious or fatal injury.

NOTICE warns about the potential risk of material damage.



This indicates additional information.

Safety warnings



Intended use

The light is designed to be mounted on the ceiling/wall in private households and is not suitable for commercial purposes.



It is intended for indoor use in dry rooms.

The light is suitable for installation on normally flammable surfaces.

Danger to children

- Keep all small parts and packaging materials out of the reach of children.
There is a risk of suffocation!

Danger due to electricity

- **Electrical installation must be performed by a qualified electrician and must comply with current national regulations.**
- The light must only be connected to a power supply line that complies with the technical specifications of the light.
- Before electrical installation, the fuse must be switched off and the power supply line voltage-free. Otherwise there is a risk of electric shock!

- The light must not be installed on a conductive surface.
- The light must not be installed in rooms where there is a risk of explosion.
- The light must not come into contact with water or other liquids, as this poses a risk of electric shock.
- Make sure there are no pipes or wires behind where you intend on drilling the holes.
- Do not connect the light if the connection cable or other parts of the product show any visible signs of damage.
- Do not make any modifications to the light or its connection cable. Have repairs carried out only by a specialist workshop or as arranged by the customer care service. Do not attempt to replace the connection cable yourself.

Risk of burns/fire

- The bulb and light may become hot during use. Do not touch them. Wait until the light has cooled completely before replacing the bulb. Do not cover the light and never hang anything from or over the light.

Material damage

- The installation materials provided are suitable for standard ceilings. Before installation, contact a specialist retailer to find out which installation materials are suitable for your ceiling and, if necessary, replace them.

- Only use the type of bulb listed in the "Technical specifications". The max. light output must not be exceeded.
- Only connect the light to an external dimmer if the respective bulb is suitable for use with the dimmer.
- Do not use any caustic, aggressive or abrasive products for cleaning.

Disposal

The product and its packaging have been manufactured from valuable materials that can be recycled. Recycling reduces the amount of refuse and preserves the environment.

Dispose of the **packaging** at a recycling point that sorts materials by type. Make use of the local facilities provided for collecting paper, cardboard and lightweight packaging.



Appliances marked with this symbol must not be disposed of along with household waste!

You are legally obliged to dispose of old appliances separately from household waste. Information about collection points where old appliances can be disposed of free of charge is available from your local authorities.

Faulty bulbs must be disposed of in an environmentally-friendly way at a collection point for electrical waste.


Cleaning

1. Switch the light off and wait until all hot parts have cooled sufficiently.
2. Clean all parts of the light with a feather duster or a dry, soft cloth.

Technical specifications

Model:	55979
Product number:	717 246
Mains voltage:	220-240 V ~ 50/60 Hz
Protection class:	I
Bulb:	1x E27, max. 40 W (not included)
Ambient temperature:	+10 to +40 °C

At a glance (contents)

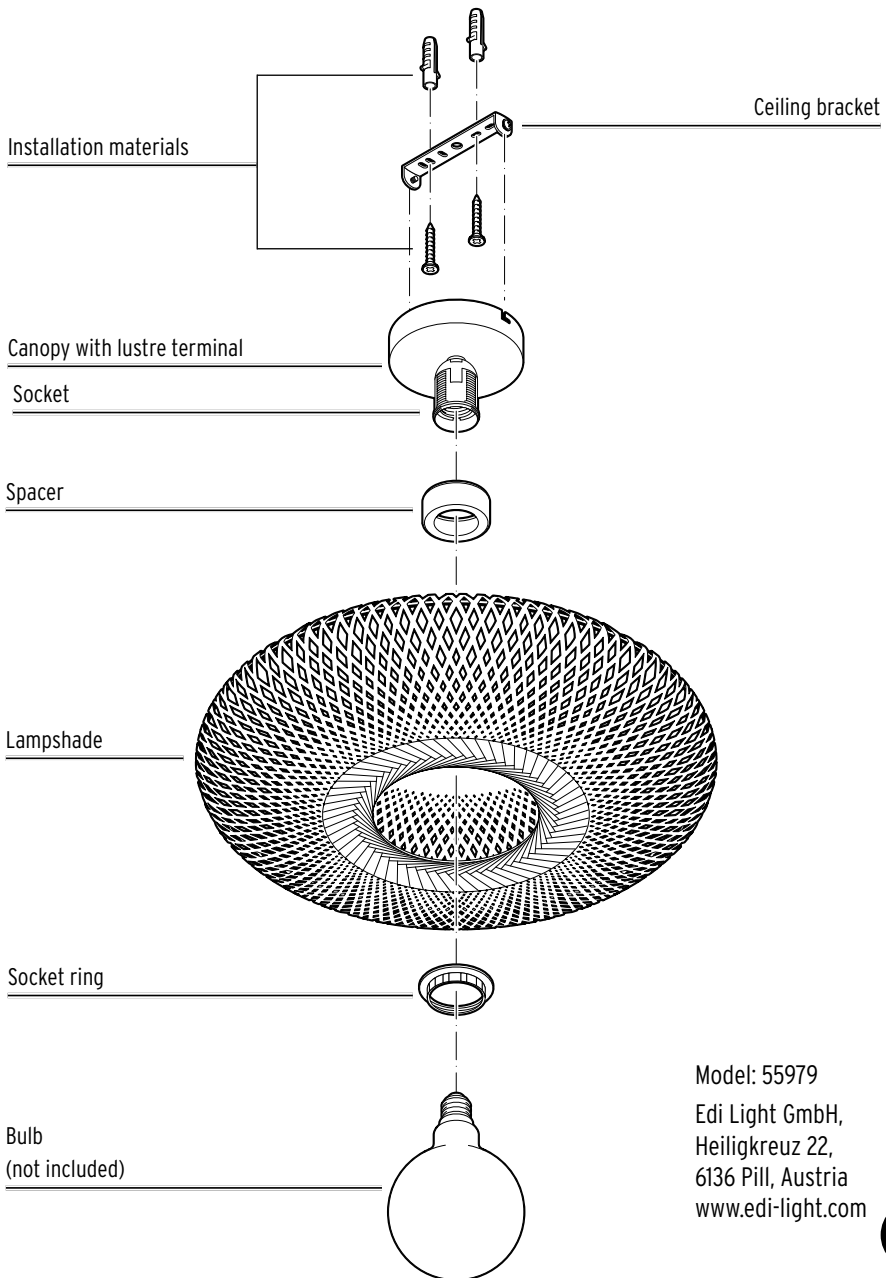

Model: 55979

Edi Light GmbH,
Heiligkreuz 22,
6136 Pill, Austria
www.edi-light.com



Product number: 717 246

Installation

Installing the canopy

The light is suitable for installation on ceilings or walls.




DANGER - risk of fatal electric shock

- Before electrical installation, the fuse must be switched off and the power supply line voltage-free.
- Make sure there are no pipes or wires behind where you intend on drilling the holes.


NOTICE - material damage

- The installation materials provided are suitable for standard ceilings. Before installation, contact a specialist retailer to find out which installation materials are suitable for your ceiling and, if necessary, replace them.

1. Switch the fuse off and make sure the power supply line is voltage-free.
2. Unscrew the socket ring from the socket.



3. Loosen the two side fixing screws which secure the ceiling bracket to the canopy until you are able to remove the ceiling bracket.
4. Mark the drill holes using the ceiling bracket as a template.
5. Drill the holes for the wall plugs.




6. Guide the electrical cables (ceiling cable) through the cable guide in the ceiling bracket. Mount the ceiling bracket on the ceiling using the screws and wall plugs.

Electrical connection - for qualified electricians only




DANGER - risk of fatal electric shock

- **Electrical installation must be performed by a qualified electrician and must comply with current national regulations.**
- Before electrical installation, the fuse must be switched off and the power supply line voltage-free.

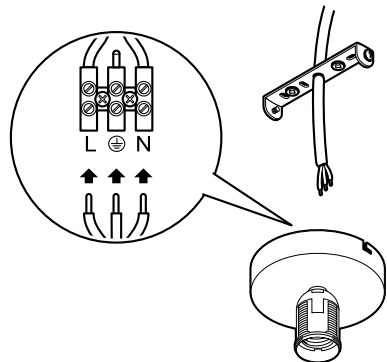


- ▷ Have the power supply lines connected to the lustre terminal by a qualified electrician.

Completing installation



1. Push the canopy onto the two slightly loose fixing screws on the ceiling bracket.
2. Tighten the fixing screws.

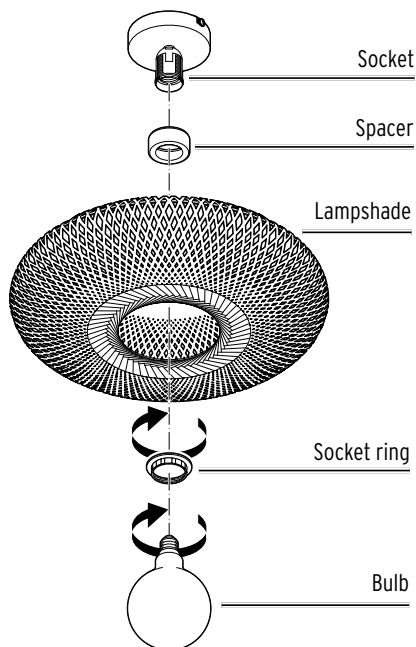

3. Slide the spacer and lampshade over the socket, screw on the socket ring and screw the bulb (not included) into the socket.

Switching the light on

- ▷ Before you switch the fuse back on and restore the power supply to connect the light, you must complete all the steps for installation.
- ▷ Press the light switch to check whether the light is connected correctly.